Mobile LED Poster

Smart mobile
Folding large screen

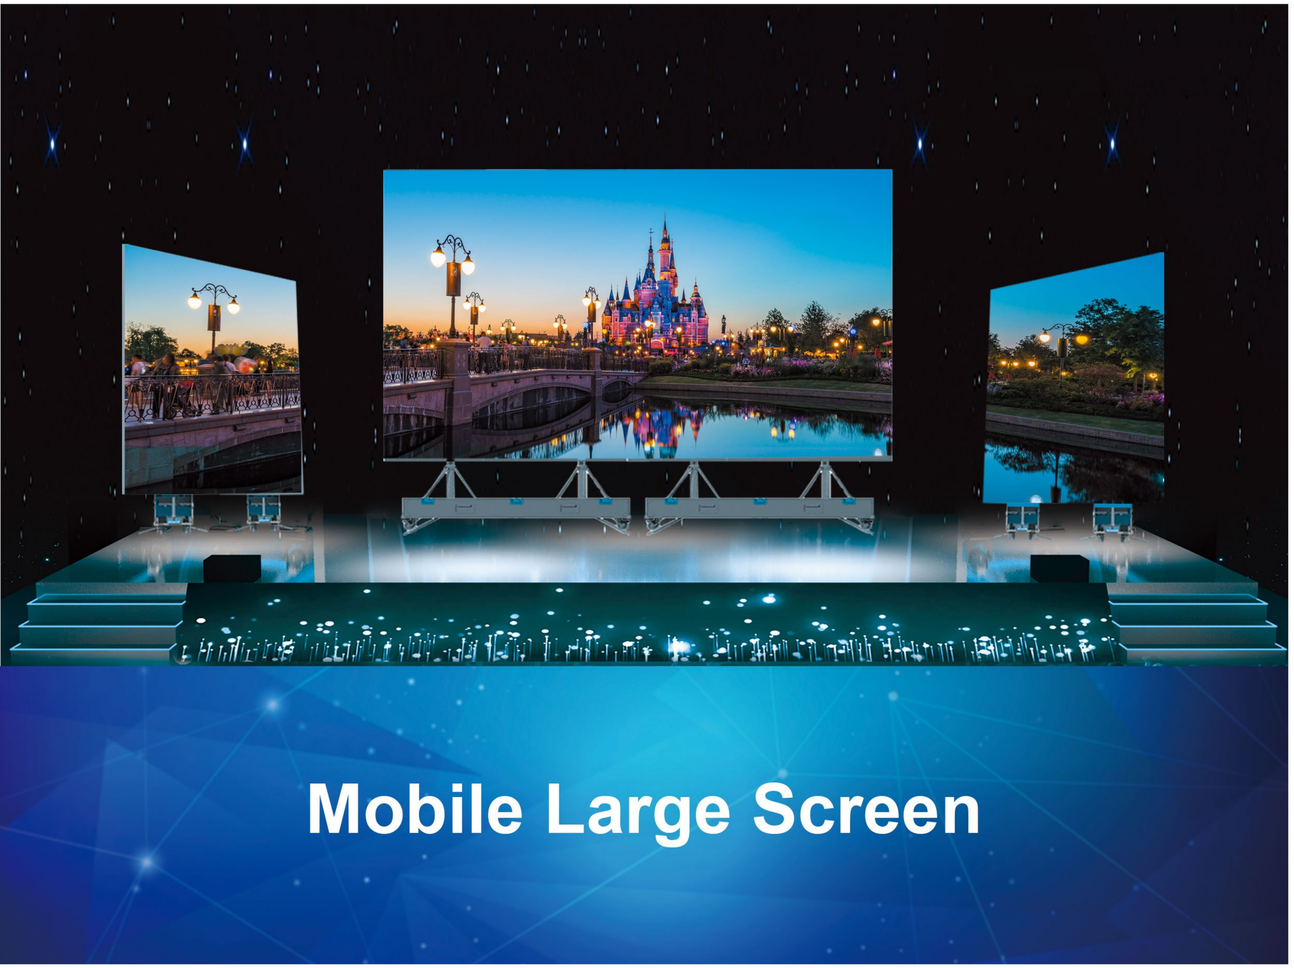

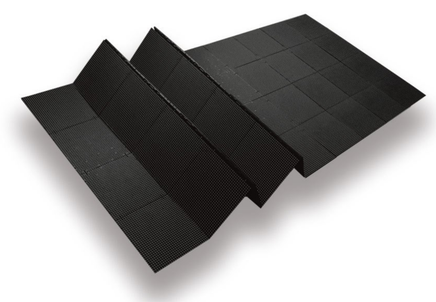

Thin, light and 360° Foldable

Features:

1. Large screen, small size, more convenient
* Small size Two air boxes, can be built on 4m X 3m screen, no need for truss
* Installation is fast. Complete the construction of 4m X 3m screen.
2 engineers only need 5 minutes.

2. Lightweight, 360° foldable
* Thin thickness The screen thickness is only 15mm, light weight,
small space after folding, reducing transportation costs
* Outdoor up to 4000HZ refresh rate, making the picture quality smoother

3.High Quality Picture and Refresh Rate
* Up to 4000HZ, which produce stable and clear pictures

4.Movable, suitable for a variety of scenarios
Widely used in indoor and outdoor stage screen construction, conferences, performances, celebrations, square stage, wedding events, etc.

CO: SHENZHEN HUAKE LIGHT ELECTRONICS CO., LTD
HUAKE LIMITED
MAIL: info@led.app
info@360digitalsignage.com
WEB: https://www.led.app
https://www.360digitalsignage.com
ADD: 1#,chaxi SanWei industial Zone,GuShu,XiXiang,BaoAn
ShenZhen,GuangDong,518126,China.

HuaKe

Mobile LED

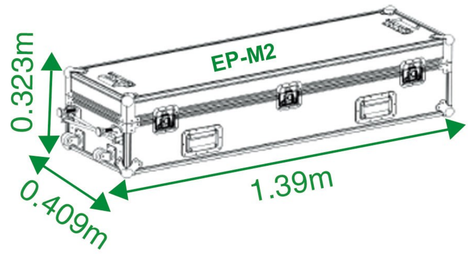



All in one

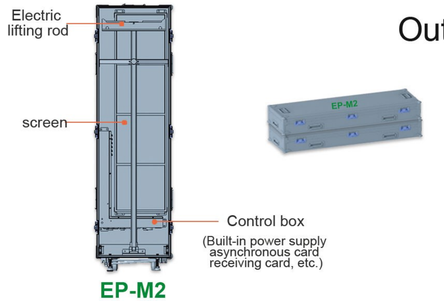

EP-M2

Airflight Case
Out-of-box installation

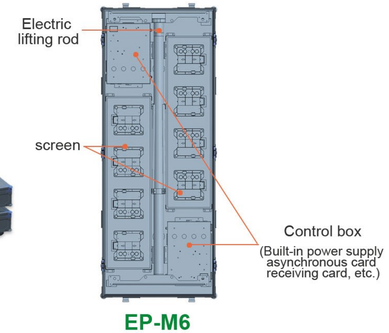

EP-M6

Seamless, Frameless, Unlimited Splicing

It solves the visual defects of the large-screen picture being segmented, presents a large and complete display picture, and can be infinitely spliced horizontally to meet the needs of various occasions.

EP-M2 Series Screen
(Seamless and Frameless)

Traditional Advertising
Stitching Screen

One Button Remote Control, Auto Update





Built-in DC motor, multi-synchronous.

The control distance can reach 100M.

Effectively reduce installation time and cost.

One button controls the screen rising and falling without manual disassembly.

Mobile LED

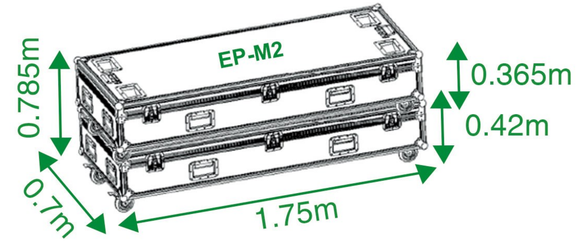

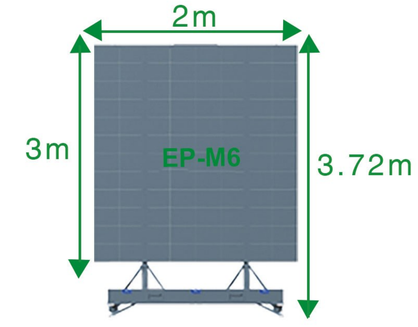

SPECIFICATION

Screen parameters	EP-M2			EP-M6		
Specifications	P3.9	P5.2	P7.8	P3.9	P5.2	P7.8
Scanning mode	16S	12S	4S	16S	12S	4S
Brightness	1000cd/m²	1500cd/m²	6000cd/m²	1000cd/m²	1500cd/m²	6000cd/m²
Refresh frequency	4000HZ	4000HZ	4000HZ	4000HZ	4000HZ	4000HZ
Screen thickness	15mm	16mm	16mm	15mm	16mm	16mm
Waterproof grade	IP43	IP43	IP65	IP43	IP43	IP65
Module Size	250x250mm			250x250mm		
Folding angle	360 degree forward and backward folding			360 degree forward and backward folding		
Screen size	2m x 1m			2m x 3m		
Screen weight	12kg/m₂			12kg/m₂		
Box specification						
Airbox dimensions	1390x409x323mm			1750x700x420mm		
Total weight	40kg			100kg		
Control box parameters						
External Battery Access	D C 2 4 V			Built in power supply	RSP2000W-24	
Built in power supply	RSP1000W-24			Asynchronous card	Built-in Nova T1, WIFI, up to 650,000 dots (Optional built-in Nova T6, WIFI, up to 1.3 million)	
Asynchronous card	Built-in Nova T1, WIFI, up to 650,000 dots			Receiving card	Nova A4S	
Receiving card	Nova A4S					
Electric lifting parameters						
working voltage	D C 2 4 V			working voltage	D C 2 4 V	
Working current	Max 0.6Amp			Working current	Max 0.6Amp	
Manipulation mode	Remote Control			Manipulation mode	Remote Control	
Telescopic speed	Max 17mm/s			Telescopic speed	Max 17mm/s	

HuaKe