

(7) WIFI Windows 7 СОМА **LCD Digital Signage**

Commercial Display Manufacturer

www.360digitalsignage.com

S





Indoor LCD Digital Signage

High-end creativity
Excellent configuration and design
Easy to installColorful image presenting
High display resolution, Under Windows OS
Grid B/S network layout, easy to Manage and Maintain

REMAINS



Outdoor LCD Digital Signage


High brightness: Common stats ≥2000 cd/ m²
Proof-ability: Wind resistant, Waterproof, Dustproof, Power off protection
Module craft: Power supply and cooling system, Air venting system/air condition Cooling module management, Easy to Manage & Maintain

Indoor Floor Standing

Surface 4mm tempered Glass protection screen

100% brand original lcd scree**n**

Cold forging and pressing Hardware perfect shape

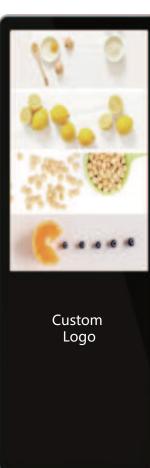


HD 1920*1080P

178° super wide viewing angle

The system optimizes multipe times to improve the running speed


Common Functions: Remote Shutdown, Restart, Play, Stop, Pause, Adjust Volume, Time Switch, WiFi connection, Automatic Loop play, Insert Play, Split Screen Play, Remote Play Monitor, Install APP Application, Play Weather, Web Page, WORD, ECXEL, PPT, PDF Document, Scrolling Subtitle ect.







Indoor Floor Standing

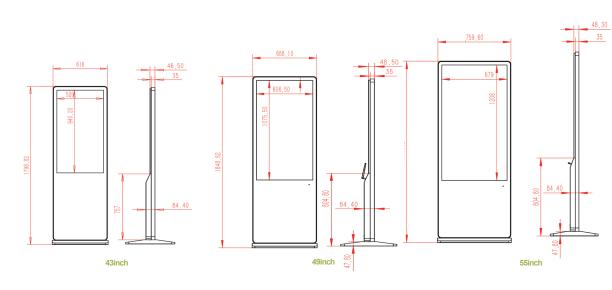



Loadable Touch Type: Infrared touchscreen, nano touchscreen, capacitive touchscreen



Increase Touchscreen to achieve Interactive Features

HK ADI-FS Series Indoor Floor Stand Advertising Digital Signage Specification						
Part No.	HK-ADI-FS-43	HK-ADI-FS-49	HK-ADI-FS-55	HK-ADI-FS-65		
LCD Screen Size	43inch	49inch	55inch	65inch		
Active Display Area	940.20(H)*529(V)mm	1074(H)*604(V)mm	1208(H)*679(V)mm	1430.5(H)*805.6(V)mm		
LCD Brand	LG/Sumsung					
Brightness	≥350cd/m²					
Diagonal	16.9					
Resolution	1920*1080					
Contrast Rate	35	3500:1		4000:1		
Color	16.7M					
Response time	θms					
Viewing Angle	H:178deg. V:178deg.					
Power Consumption(w)	≥170w					
Operating Temperature	-5°C ~ 60°C(11°F ~ 140°F)					
Operating Humidity	10% ~ 80%					
Input voltage	AC100-240V (50/60Hz)					
Standalone Version	HDMI/ USB2.0 / SD / 1G+8G RAM					
Android Version	Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0					
Android +CDMS Version	CDMS Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0 5166					
Windows Version	i3 / i5 / i7 / 4GRAM ;128GB SSD, Win7 / Wi-Fi, LAN , VGA, HDMI, USB2.0					
Touch Screen(optional)	hfrared Touch Version / Nanoscale Touch Version					
WAN(optional)	3G/4G					
Appearance size	1798*616*84mm	1848*688*84mm	1898*760*84mm	2098*906*84mm		
Weight	65 Kg	80 Kg	90 Kg	105 Kg		
Packing Size	1850*725*210mm	1900*795*210mm	1950*865*210mm	2150*1015*210mm		





Indoor Wall Mounting

High brightness 350-500nits, Adapt Brand new LG/Sharp/Samsung LED screen


Automatically Generating Playing List/Mixed Displaying of Videos, Images and music.

Support IR Remote controller, user Can use remote controller to Operate the whole lcd.

Image. Format: JPEG, BMP, GIF, PNG, etc. Sound Format: MP3, WMA, OGG, AAC, AC, DTS, FLAC, APE, etc. Video Format: MP4, AVI, DIVA, XVIA, VOB, DAT, MPG, RM, RMVB, MOV, HDMOV, M4V, PMP, AVC, FLV, etc.



Indoor Wall Mounting

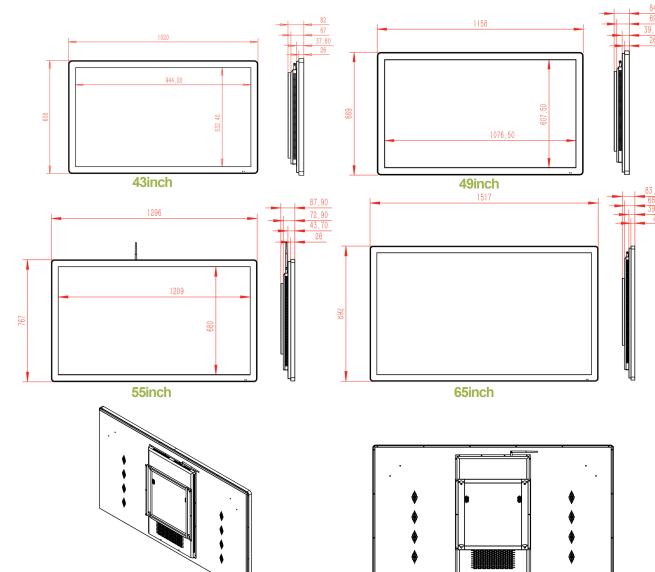



HK ADI-WM Series Indoor Wall Mount Advertising Digital Signage Specification					
Part No.	HK-ADI-WM-43	HK-ADI-WM-49	HK-ADI-WM-55	HK-ADI-WM65	
LCD Screen Size	43inch	49inch	55inch	65inch	
Active Display Area	940.20(H)*529(V)mm	1074(H)*604(V)mm	1208(H)*679(V)mm	1430.5(H)*805.6(V)mm	
LCD Brand	LG / Sumsung				
Brightness	≥350cd/m²				
Diagonal	16.9				
Resolution	1920*1080				
Contrast Rate	3500:1		4000:1		
Color	16.7M				
Response time	8ms				
Viewing Angle	H:178deg. V:178deg.				
Power Consumption(w)	≥170w				
Operating Temperature	-5°C ~ 60°C(11°F ~ 140°F)				
Operating Humidity	10% ~ 80%				
Input voltage	AC100-240V (50/60Hz)				
Standalone Version	HDMI/VGA/USB2.0/SD/1G+8G RAM				
Android Version	Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0				
Windows Version	i3 / i5 / i7 / 4GRAM ;128GB SSD, Win7 / Wi-Fi, LAN , VGA, HDMI, USB2.0				
Touch Screen(optional)	Infrared Touch Version / Nanoscale Touch Version				
WAN(optional)	36/46				
Appearance size	1020*618*84mm	1158*609*84mm	1296*767*84mm	1517*892*84mm	
Weight	34 Kg	43 Kg	51Kg	63 Kg	
Packing Size	1080*695*180mm	1244*785*180mm	1360*855*180mm	1578*975*180mm	

HuaKe

Outdoor Floor Standing

Surface 6mm tempered Glass protection screen

100% brand original lcd screen

Cold forging and pressing Hardware perfect shape



HD 1920*1080P


178° super wide viewing angle


The system optimizes multipe times to improve the running speed


Common Functions: Remote Shutdown, Restart, Play, Stop, Pause, Adjust Volume, Time Switch, WiFi connection, Automatic Loop play, Insert Play, Split Screen Play, Remote Play Monitor, Install APP Application, Play Weather, Web Page, WORD, ECXEL, PPT, PDF Document, Scrolling Subtitle ect.



Outdoor Floor Standing








65inch


904


43inch


49inch

55inch











THEFT.		The second second	-		
	HK ADO-F	S Series Outdoor Floor Stand Advertising D	Digital Signage Specific	cation	
Part No.	HK-ADO-FS-43	HK-ADO-FS-49	HK-ADO-FS-55	HK-ADO-FS-65	
LCD Screen Size	43inch	49inch	55inch	65inch	
Active Display Area	943*532mm	1074*604mm	1213*684mm	1428*803mm	
LCD Brand		LG / Sumsung			
Brightness		2000 cd/m ²			
Diagonal		16.9			
Resolution		1920*1080			
Contrast Rate		1000:1			
Color		16.7M			
Response time		8ms			
Viewing Angle		H:178deg. V:178deg.			
Power Consumption(w)		>350W			
Operating Temperature	-5°C ~ 60°C(11°F ~ 140°F)				
Operating Humidity		$10\% \sim 80\%$			
nput voltage	AC100-240V (50/60Hz)				
Standalone Version	HDMI/ VGA/ USB2.0 / SD / 1G+8G RAM				
Android Version	Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0				
Android +CDMS Version	CDMS Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0				
Windows Version	i3 / i5 / i7 / 4GRAM ;128GB SSD, Win7 / Wi-Fi, LAN , VGA, HDMI, USB2.0				
Fouch Screen(optional)	Nanoscale /Capacitance Touch Version				
WAN(optional)	3G / 4G				
Size	1900*800*220mm	1900*800*220mm	2030*880*220mm	2200*1000*220mm	
Weigth	120Kg	125Kg	145Kg	170Kg	
Packing Size	2000*900*320mm	2000*900*320mm	2130*980*320mm	2300*1100*320	

Outdoor Wall Mounting

High brightness 2000nits, Adapt Brand new LG/Sharp/Samsung LED screen

Automatically Generating Playing List/Mixed Displaying of Videos, Images and music.


Support IR Remote controller, user Can use remote controller to Operate the whole lcd.





Image. Format: JPEG, BMP, GIF, PNG, etc. Sound Format: MP3, WMA, OGG, AAC, AC, DTS, FLAC, APE, etc. Video Format: MP4, AVI, DIVA, XVIA, VOB, DAT, MPG, RM, RMVB, MOV, HDMOV, M4V, PMP, AVC, FLV, etc.

Outdoor Wall Mounting

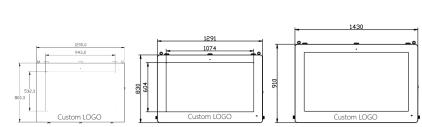

43inch

76,5 180,0 T



55inch



65inch

6

180_





	HK ADO-WM Series Outdoor Wall Mount Advertising Digital Signage Specification				
Part No.	HK-ADO-WM-43	HK-ADO-WM-49	HK-ADO-WM-55	HK-ADO-WM-65	
LCD Screen Size	43inch	49inch	55inch	65inch	
Active Display Area	943*532mm	1074*604mm	1213*684mm	1428*803mm	
LCD Brand		LG / Sumsung			
Brightness		2000 cd/m ²			
Diagonal		16:9			
Resolution		1920*1080			
Contrast Rate		1000:1			
Color	16.7M				
Response time	8ms				
Viewing Angle	H:178deg. V:178deg.				
Power Consumption(w)	>350W				
Operating Temperature	-5°C ~ 60°C(11°F ~ 140°F)				
Operating Humidity	$10\% \sim 80\%$				
Input voltage	AC100-240V (50/60Hz)				
Standalone Version	HDMI/VGA/USB2.0/SD/1G+8G RAM				
Android Version	Above Android 4.2 / Quad Core1.8G / 1G+8G RAM / Wi-Fi, LAN, HDMI, USB2.0				
Windows Version	i3 / i5 / i7 / 4GRAM ;128GB SSD, Win7 / Wi-Fi, LAN , VGA, HDMI, USB2.0				
Touch Screen(optional)	Nanoscale /Capacitance Touch Version				
WAN(optional)	3G/4G				
Size	1200*800*256.5mm	1200*800*258mm	1291*830*256mm	1650*1030*256mm	
Weigth	75Kg	100Kg	100Kg	125Kg	
Packing Size	1300*900*357mm	1300*900*358mm	1391*930*356mm	1750*1130*356mm	

